

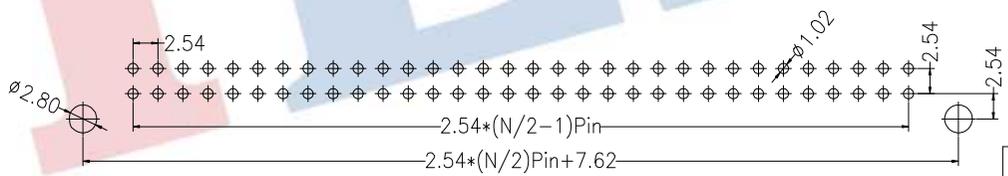
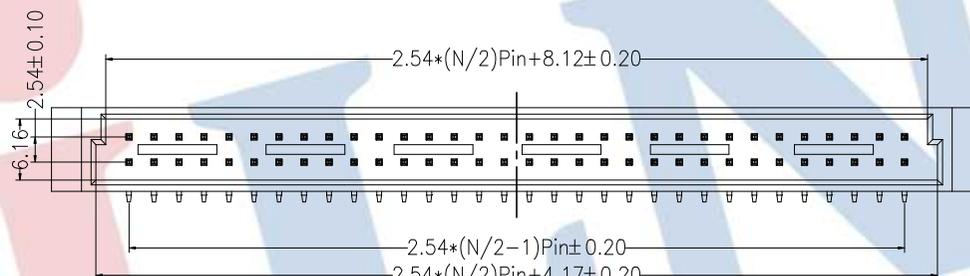



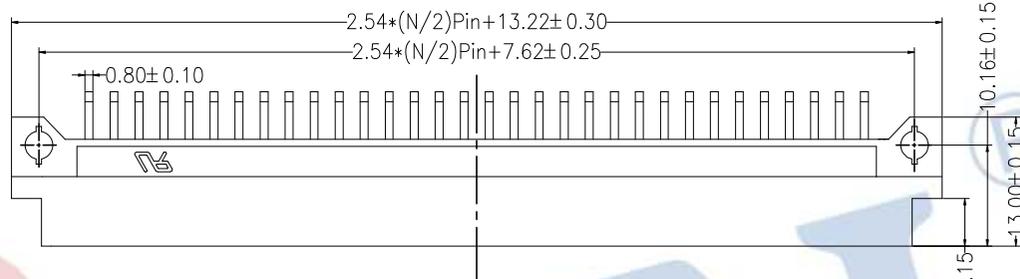

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245°C±5°C, 10s(PBT insulator)

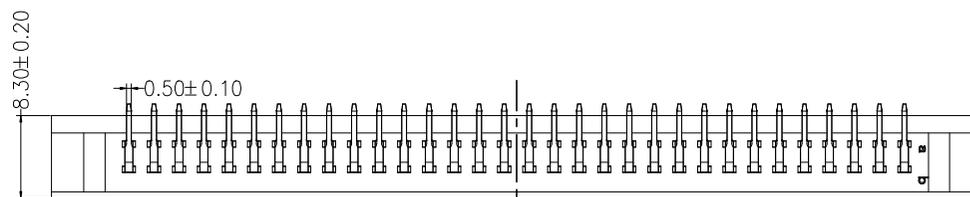

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

**Ordering Information**

**35112 XX B M R XX BNA X**

- No. of Pins: NPin
- Contact Type: M=Male, F=Female
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:3U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin
- Stream Code

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2023.02.13	NEW DRAWING	

OPERATION		DRAW	Jelly Feng	2023.02.13	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	35112XXBMRXXBNAX
TITLE:	欧式插座 公座 90° 成品系列图