
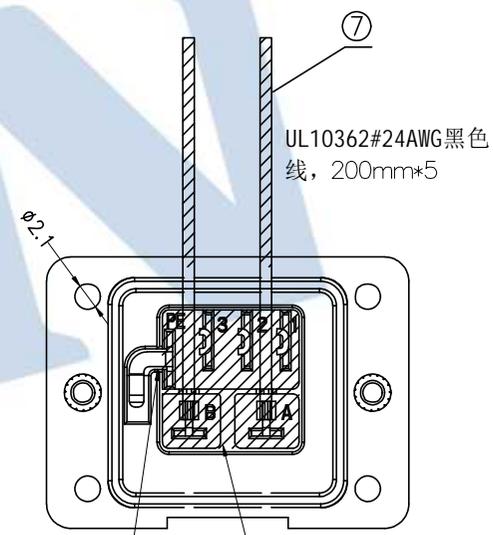
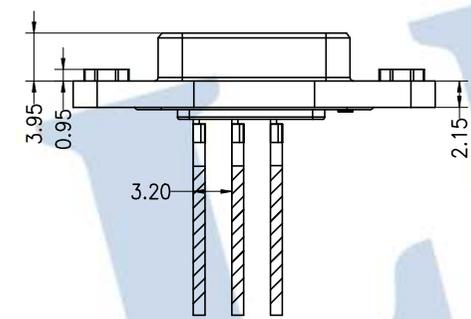
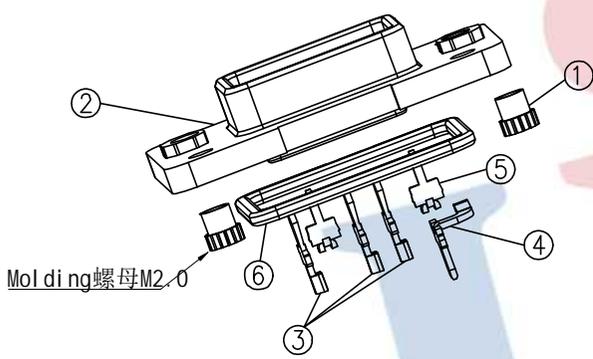
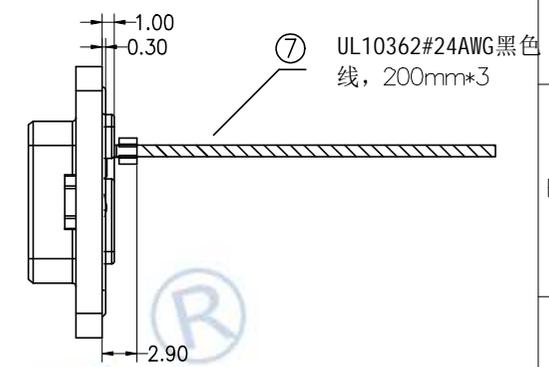


HSF RoHS

Note:
 Current Rating: POWER CONTACT 7A ma.
 BRAKE CONTACT 1A ma.
 Voltage Rating: POWER CONTACT 200 VAC.
 BRAKE CONTACT 100 VAC.
 Insulation Resistance:>1000 MΩ at
 @500VDC
 Withstand Voltage:1500VAC for 1 minute
 Contact Resistance: 10 MΩ MAX
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PBT (UL94V-0) Black

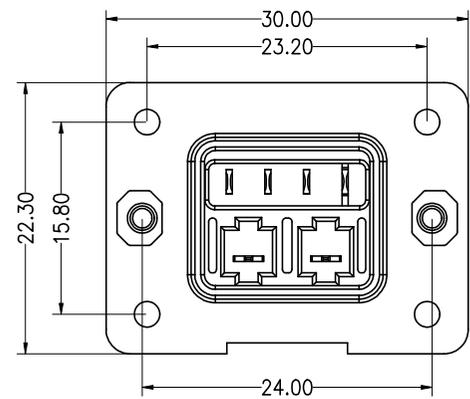

注意此处缺口位置不可有胶溢出

阴影部分打胶高度盖过端子平面, 不超过围栏高度.

NO	NAME	Q'TY	MATERIAL	DESCRIPTION	REMARKS
1	NUT	2	COPPER ALLOY	NATURAL COLOR	M2*0.4
2	HOUSING	1	PA46 UL94V-0	BLACK	
3	POWER CONTACT	3	COPPER ALLOY	PLATING GOLD	
4	GROUND CONTACT	1	COPPER ALLOY	PLATING GOLD	
5	BRAKE CONTACT	2	COPPER ALLOY	PLATING GOLD	
6	SOCKET SEALING	1	SYNTHETIC RUBBER	YELLOW	
7	WIRE ROD	5	UL10362#24AWG	BLACK	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Tim Chu	2021.09.20	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	6353-06BS1WB01
A0	2021.09.20	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/2	TITLE:	伺服电动机动力焊线式底座4+2Pin连接器/带线/带刹车线
				Angle	±3°				PROJ.	◆		
				DIM	TOL							

