
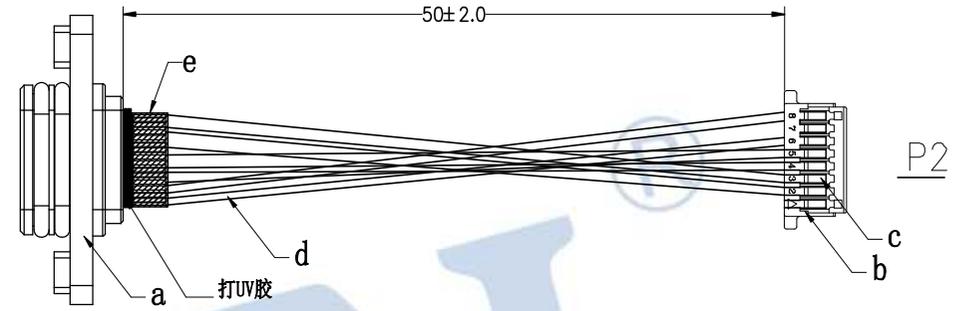


HSF RoHS


Note:
 Current Rating: 1A max.
 Voltage Rating: 100 VAC.
 Insulation Resistance: >1000 MΩ at @500VDC
 Withstand Voltage: 500VAC for 1 minute
 Contact Resistance: 10 mΩ MAX
 Operation Temperature: -40°C to +125°C
 Solder Temperature: 255~265°C for 5~10sec.

Contact Material: Copper Alloy
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Synthetic Resin (UL94V-0) Black

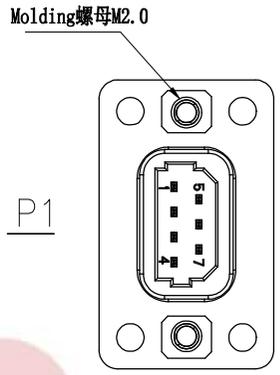

接线表

P1	颜色	P2
1	红色	1
2	黑色	2
5	蓝色	3
6	黄色	4
3	棕色	5
4	白色	6
-	空	7
7	绿色	8

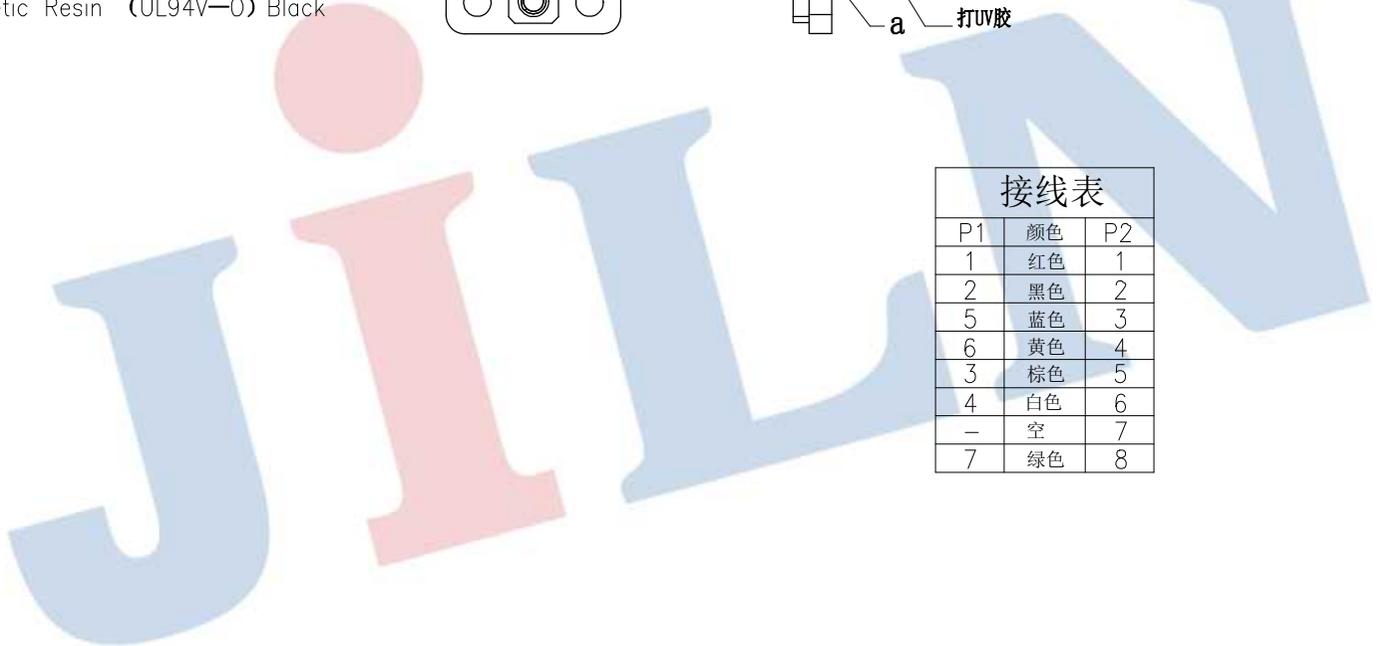

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	Tim Chu	2021.09.20	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5992
A0	2021.09.20	NEW DRAWING		X.X ±0.30	CHECK	Ou Yang Hui	2021.09.20	UNIT	mm	
				X.XX ±0.20				SIZE	A4	TITLE: 伺服电机编码器焊线式底座7Pin连接器/带线/防呆型
				X.XXX ±0.10				SHEET	1/2	
				Angle ±3°	APPROVE	Wang Wei	2021.09.20	PROJ.	☯	
				DIM TOL						