



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au or Sn Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 230℃±5℃ 5S

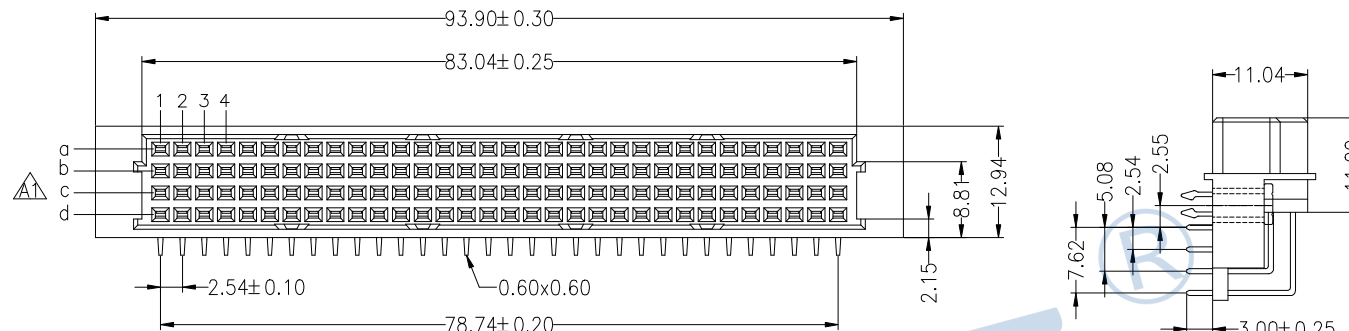

W=With Lock

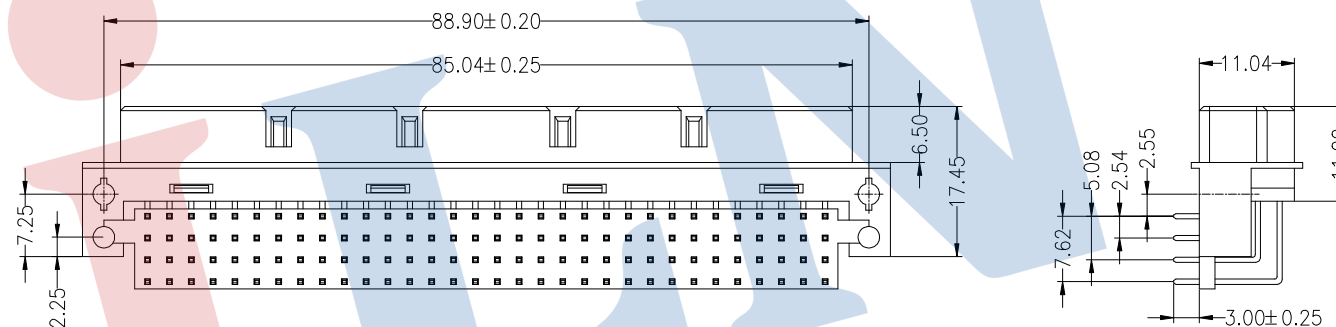

N=W/O Lock

Ordering Information

3511 4128 A F R XX B X A X

Pin No.
See Table


Contact Type
F=Female

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin

Lock
W=With Lock
N=W/O Lock

Stream Code
1~99

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

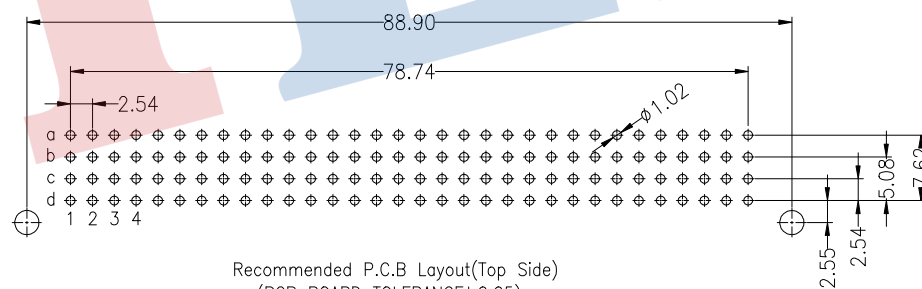

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Jelly Feng

2023.09.16

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

JILN®深圳锦凌电子股份有限公司

SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.

35114128AFRXXBXAX

TITLE:

DIN 41612 90° 4x32P Female